





## **SPECIFICATION**

## LINEAR LUXE SERIES

Construction: Loop Pile

Pile Fiber Composition: 100%PP

Tufting Gauge: 1/12"

Dye Method: Solution Dyed

Pile Weight: 550g/m<sup>2</sup>

Total Weight: 3600g/m<sup>2</sup> ±3%

Pile Height: 3.5±0.5mm

Total Thickness: Approx 6.0mm

Primary Backing: Polyester Spunbonded

**Backing Structure: Glass Reinforced PVC** 

Tile Size: 25cm x 100cm

Recommended Installation: Monolithic or

**QuarterTurned** 



Static Electricity
Permanent Lifetime Protection-less than 3.5kv.



Superior Sound insulation effect



Lodging-resistant superior resilience of fiber, suitable for wheels.



Anti-soil Treatment
Soil resistance treatment.



Anti Rubbing and feet trample because of fiber's properties



**Wear Warranty** 

Product is warranted not to lose more than 15% pole fiber by weight in normal commercial use within 15 years.



**Dimensional Stability** 

Warranted not to change in size by more than 0.5mm in normal use will nor dome or dish in normal use.



Installation

Tackifier or releasable Adhesive Recommended.




Colour Fastness to Rubbing According to GB/T3920-2008 standards it is  $\geq$  Grade 4 for dry rubbing  $\geq$ Grade 3 for wet rubbing.




Sustainability

All yarns used are Solution dyed to minimize use water And exclude any effluent production. ISO14001 and ISO9001.

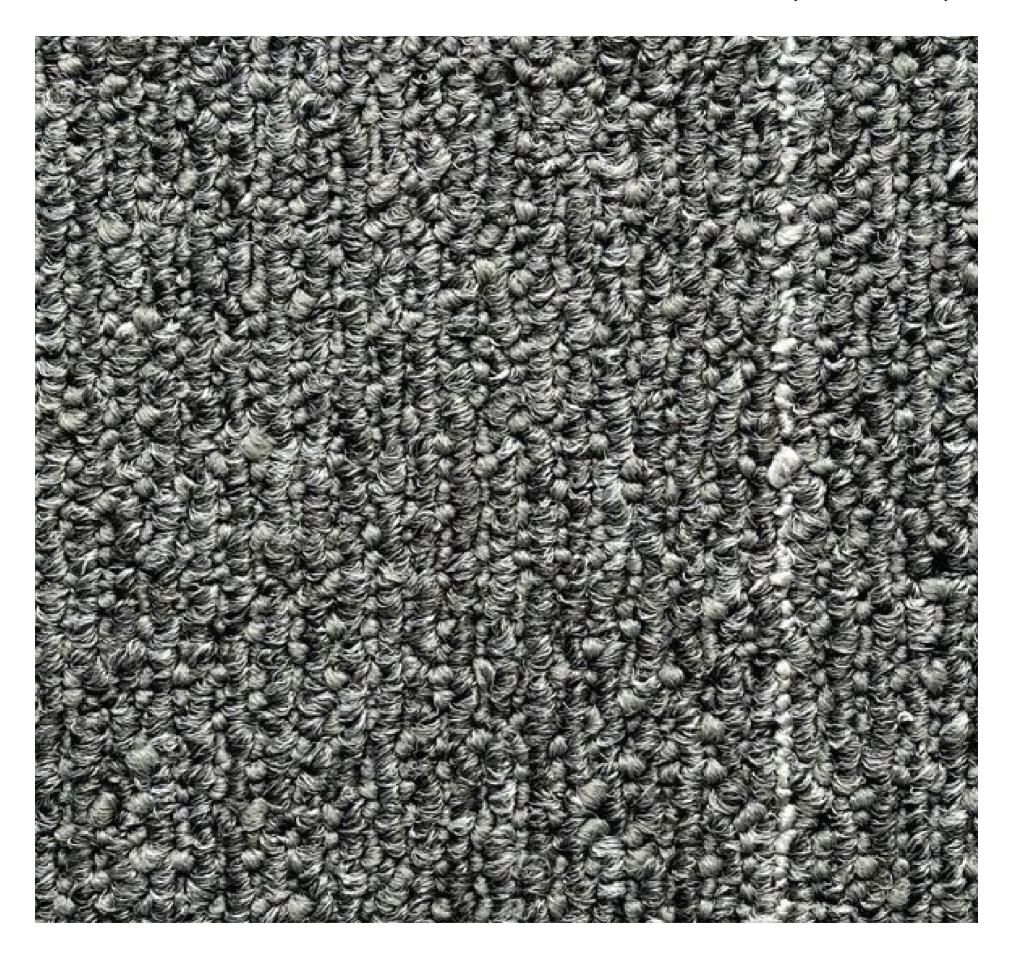

MELD GRAY LL - 01

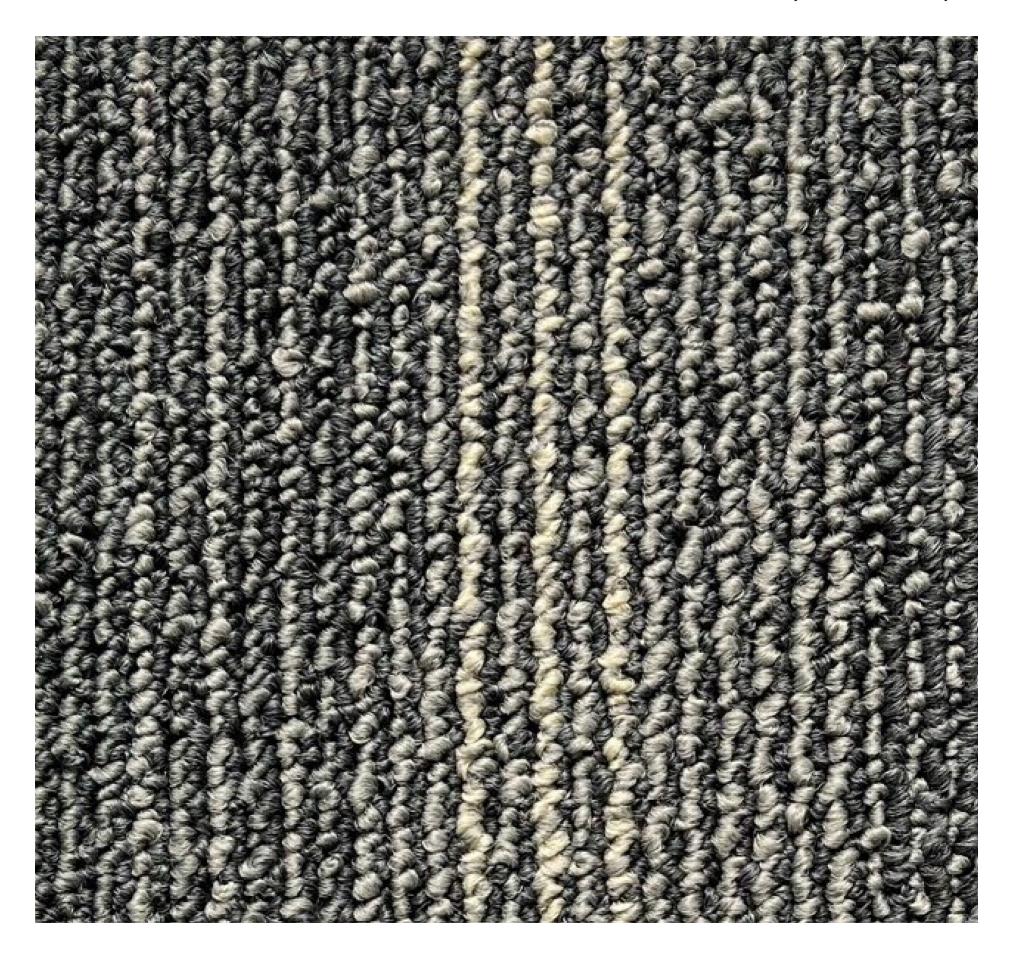

MISCELLA ASH LL - 02



SMOKE BLUE LL - 03



RADIUS RUST LL - 04











