



ISO 9001:2000 Certified Company

Vertical Blinds



Revolve

825

826

827

828

829

830

831

832

Revolve Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.58 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Revolve Series





ISO 9001:2000 Certified Company

Vertical Blinds



Flaxen

750

751

752

753

754

755

Flaxen Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.85 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Flaxen Series



ISO 9001:2000 Certified Company

Vertical Blinds



Ample

600

601

602

603

604

605

606

607

Ample Series



ISO 9001:2000 Certified Company



Technical Detail


Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.60 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Ample Series



ISO 9001:2000 Certified Company

Vertical Blinds

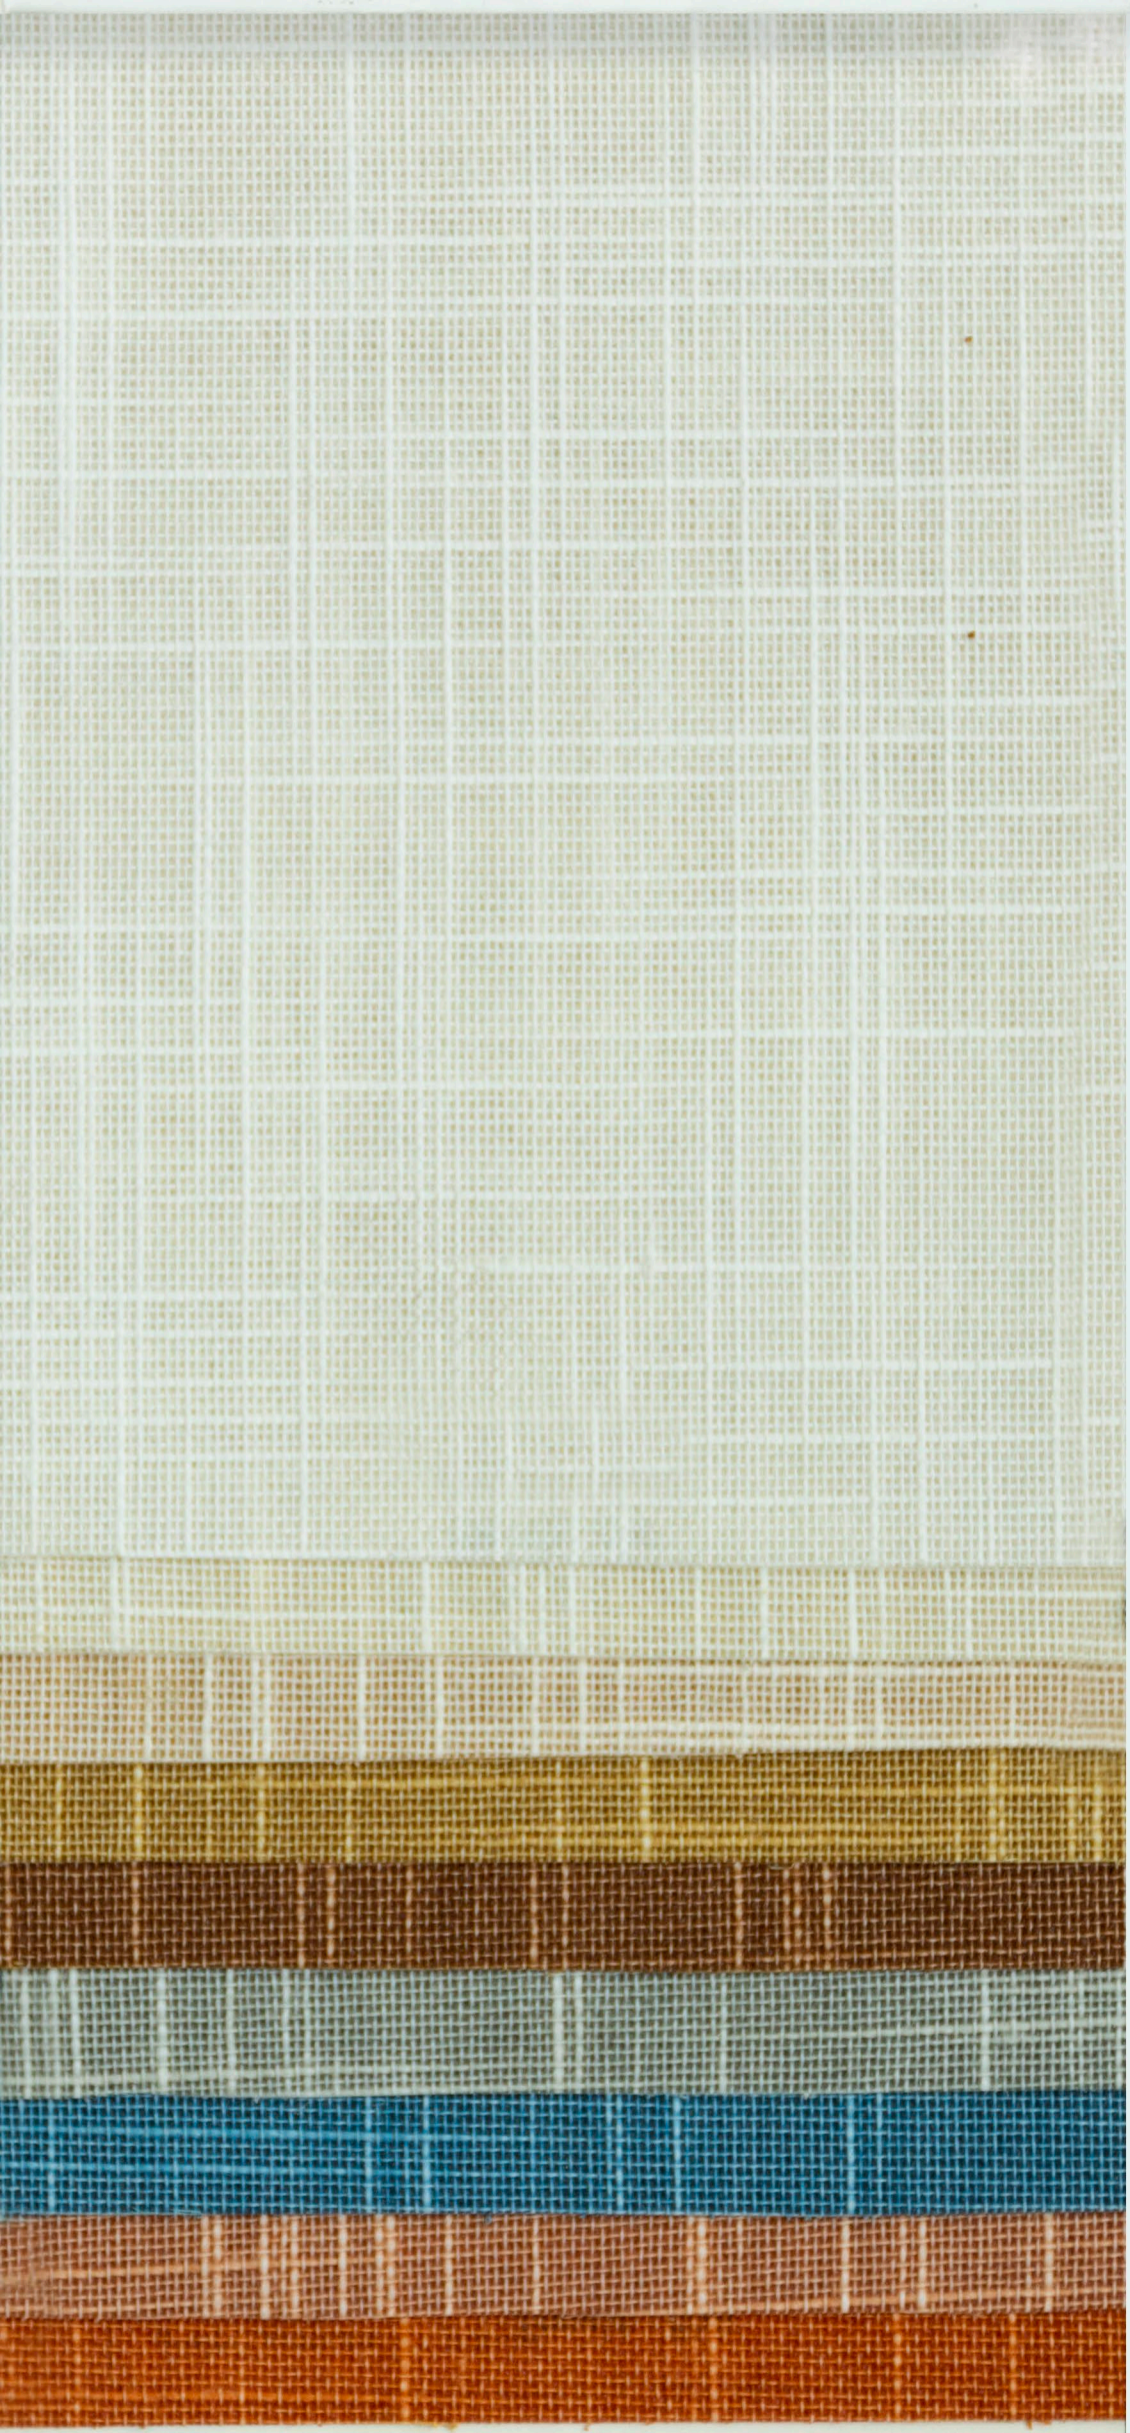

Equate

650

651

652

653

654

655

656

657

658

Equate Series



ISO 9001:2000 Certified Company



Technical Detail




Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.55 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Equate Series



ISO 9001:2000 Certified Company

Vertical Blinds

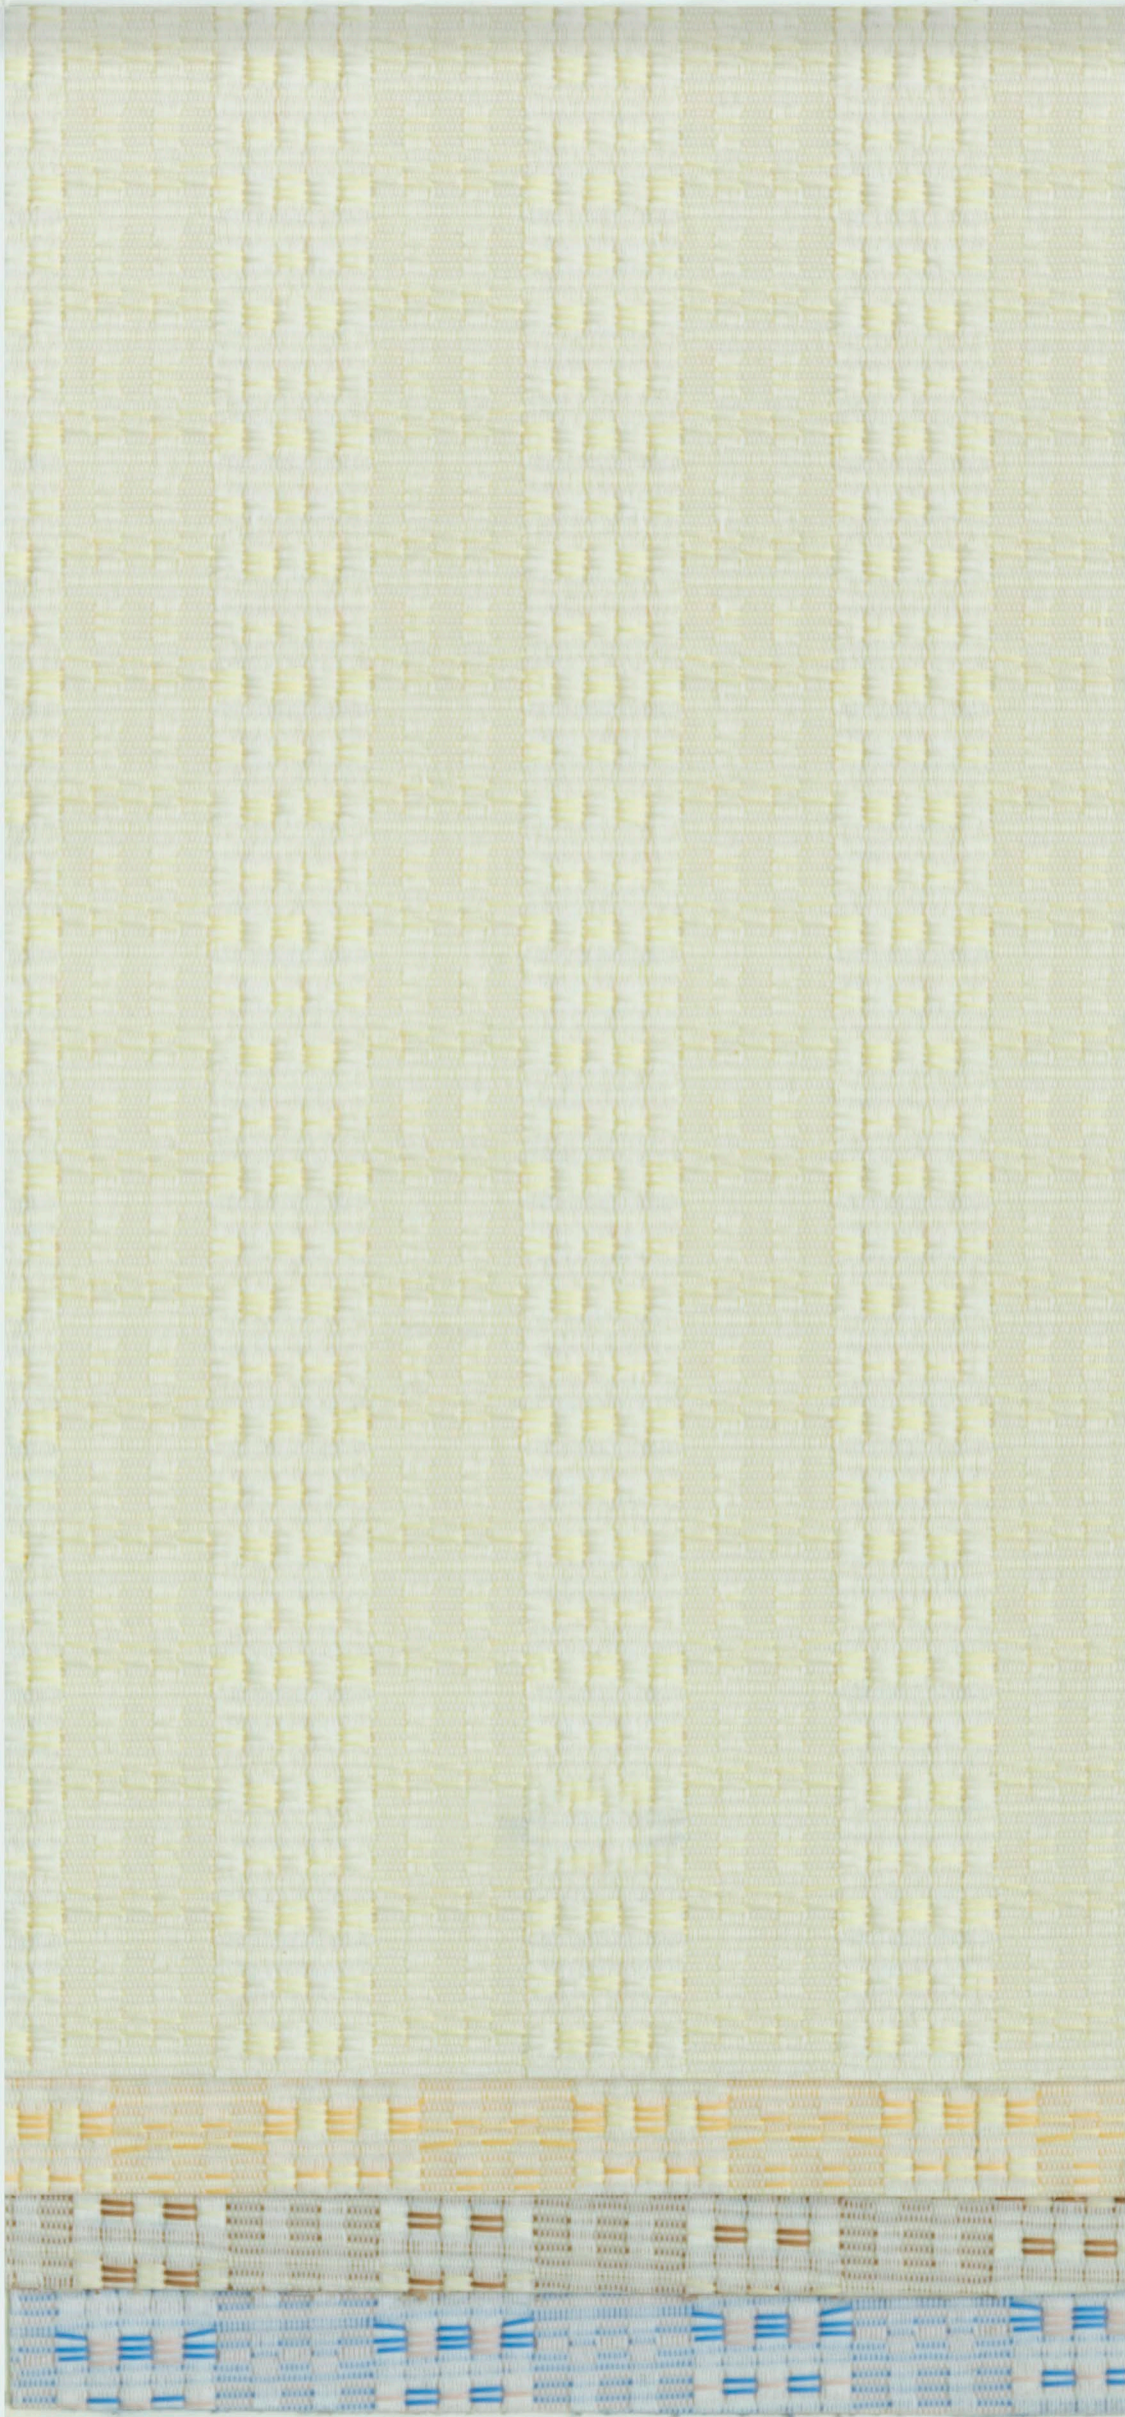

Jentex

775

776

777

778

Jentex Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.55 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent


Jentex Series





ISO 9001:2000 Certified Company

Vertical Blinds

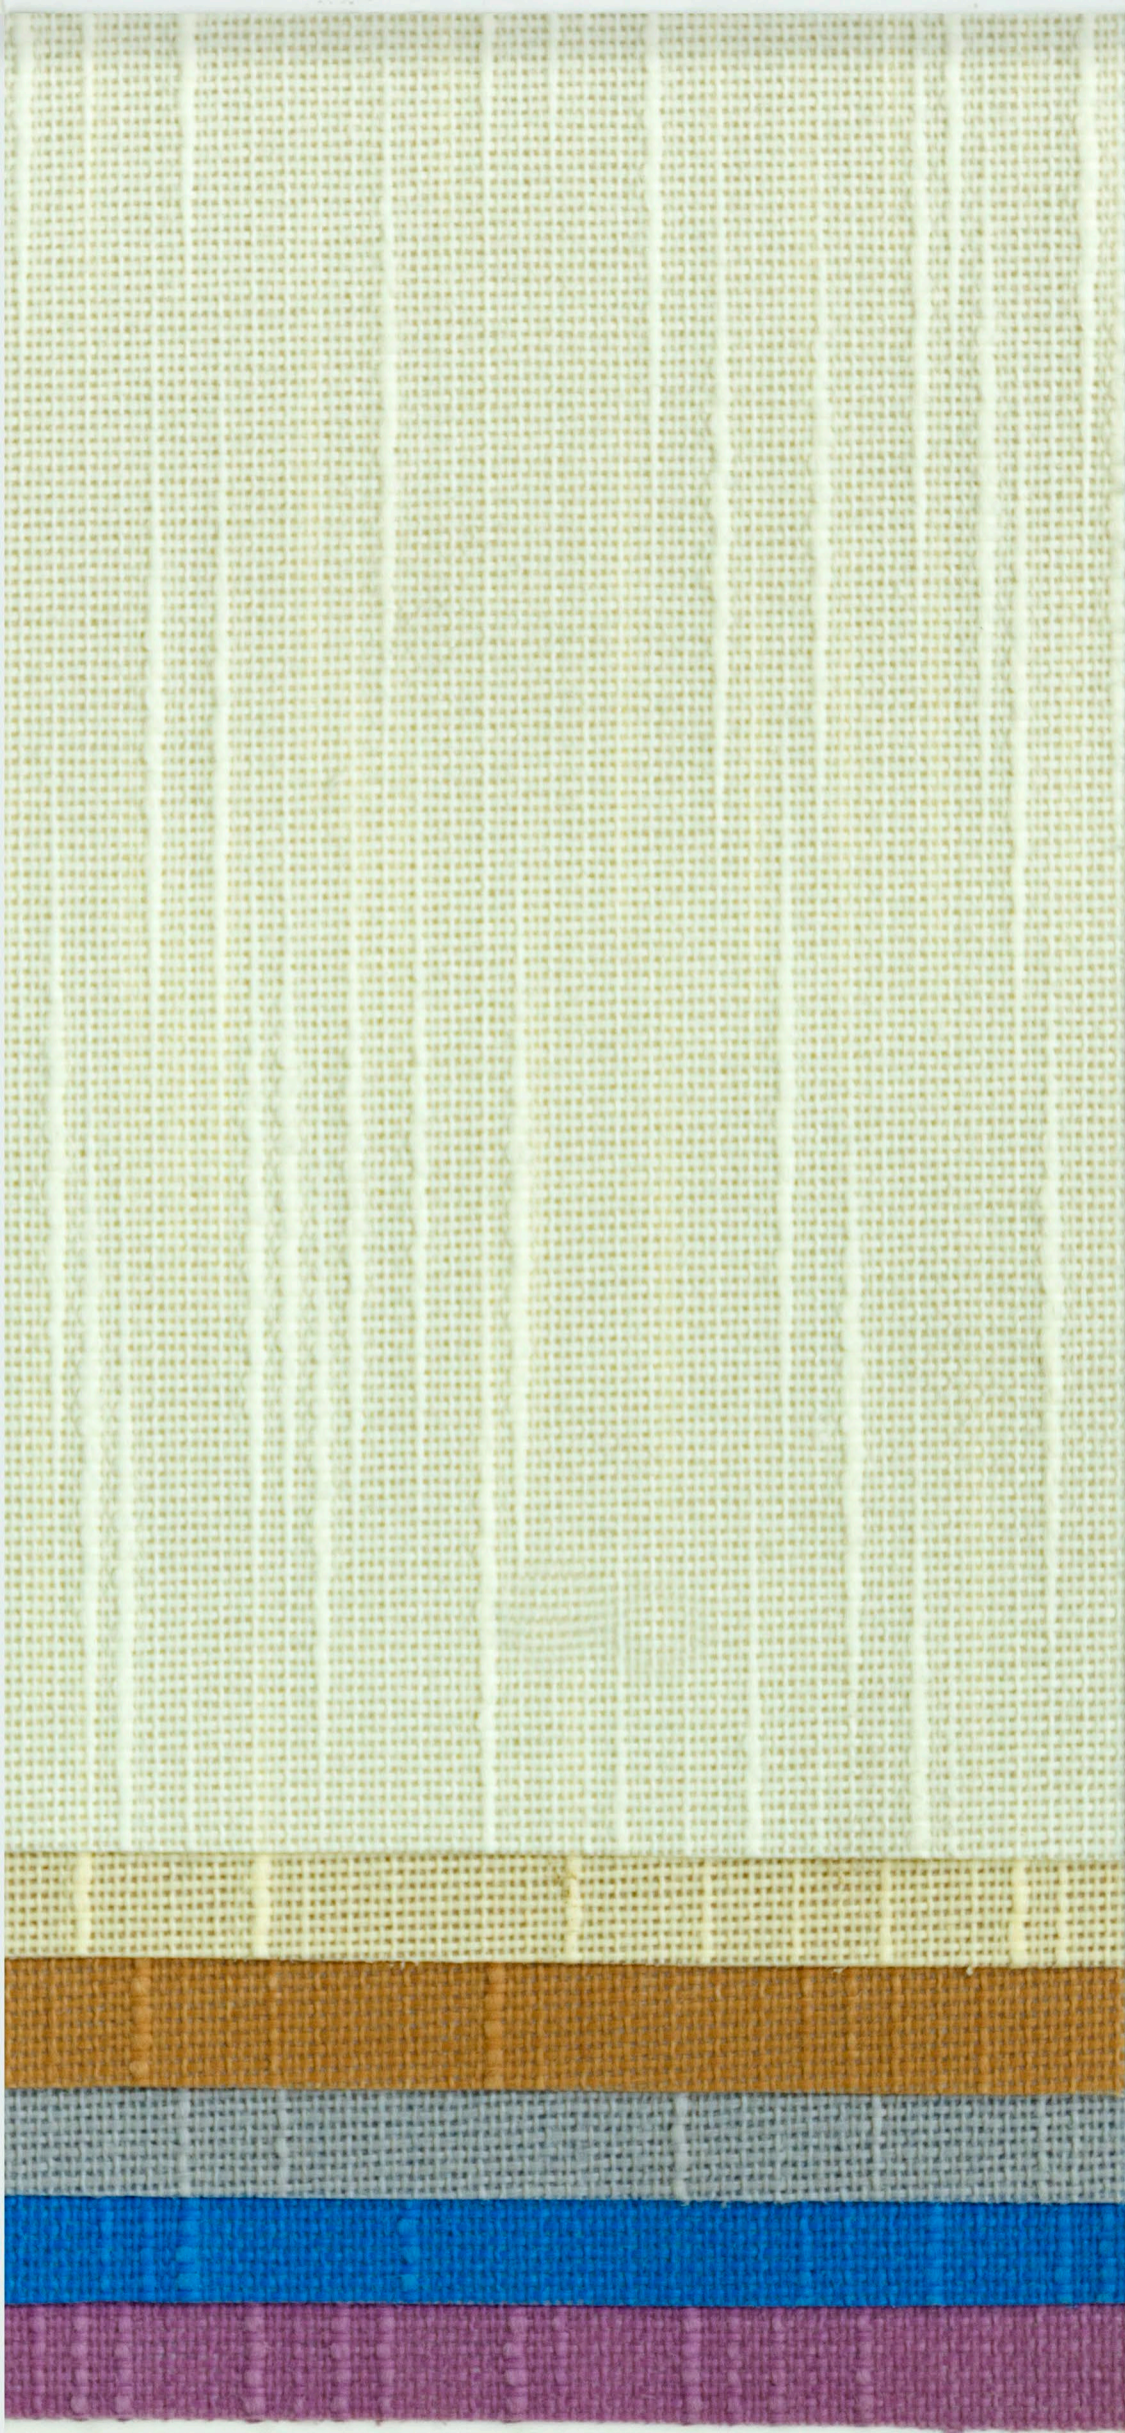

Lark

725

726

727

728

729

730

Lark Series



ISO 9001:2000 Certified Company



Technical Detail


Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.65 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Lark Series



ISO 9001:2000 Certified Company

Vertical Blinds

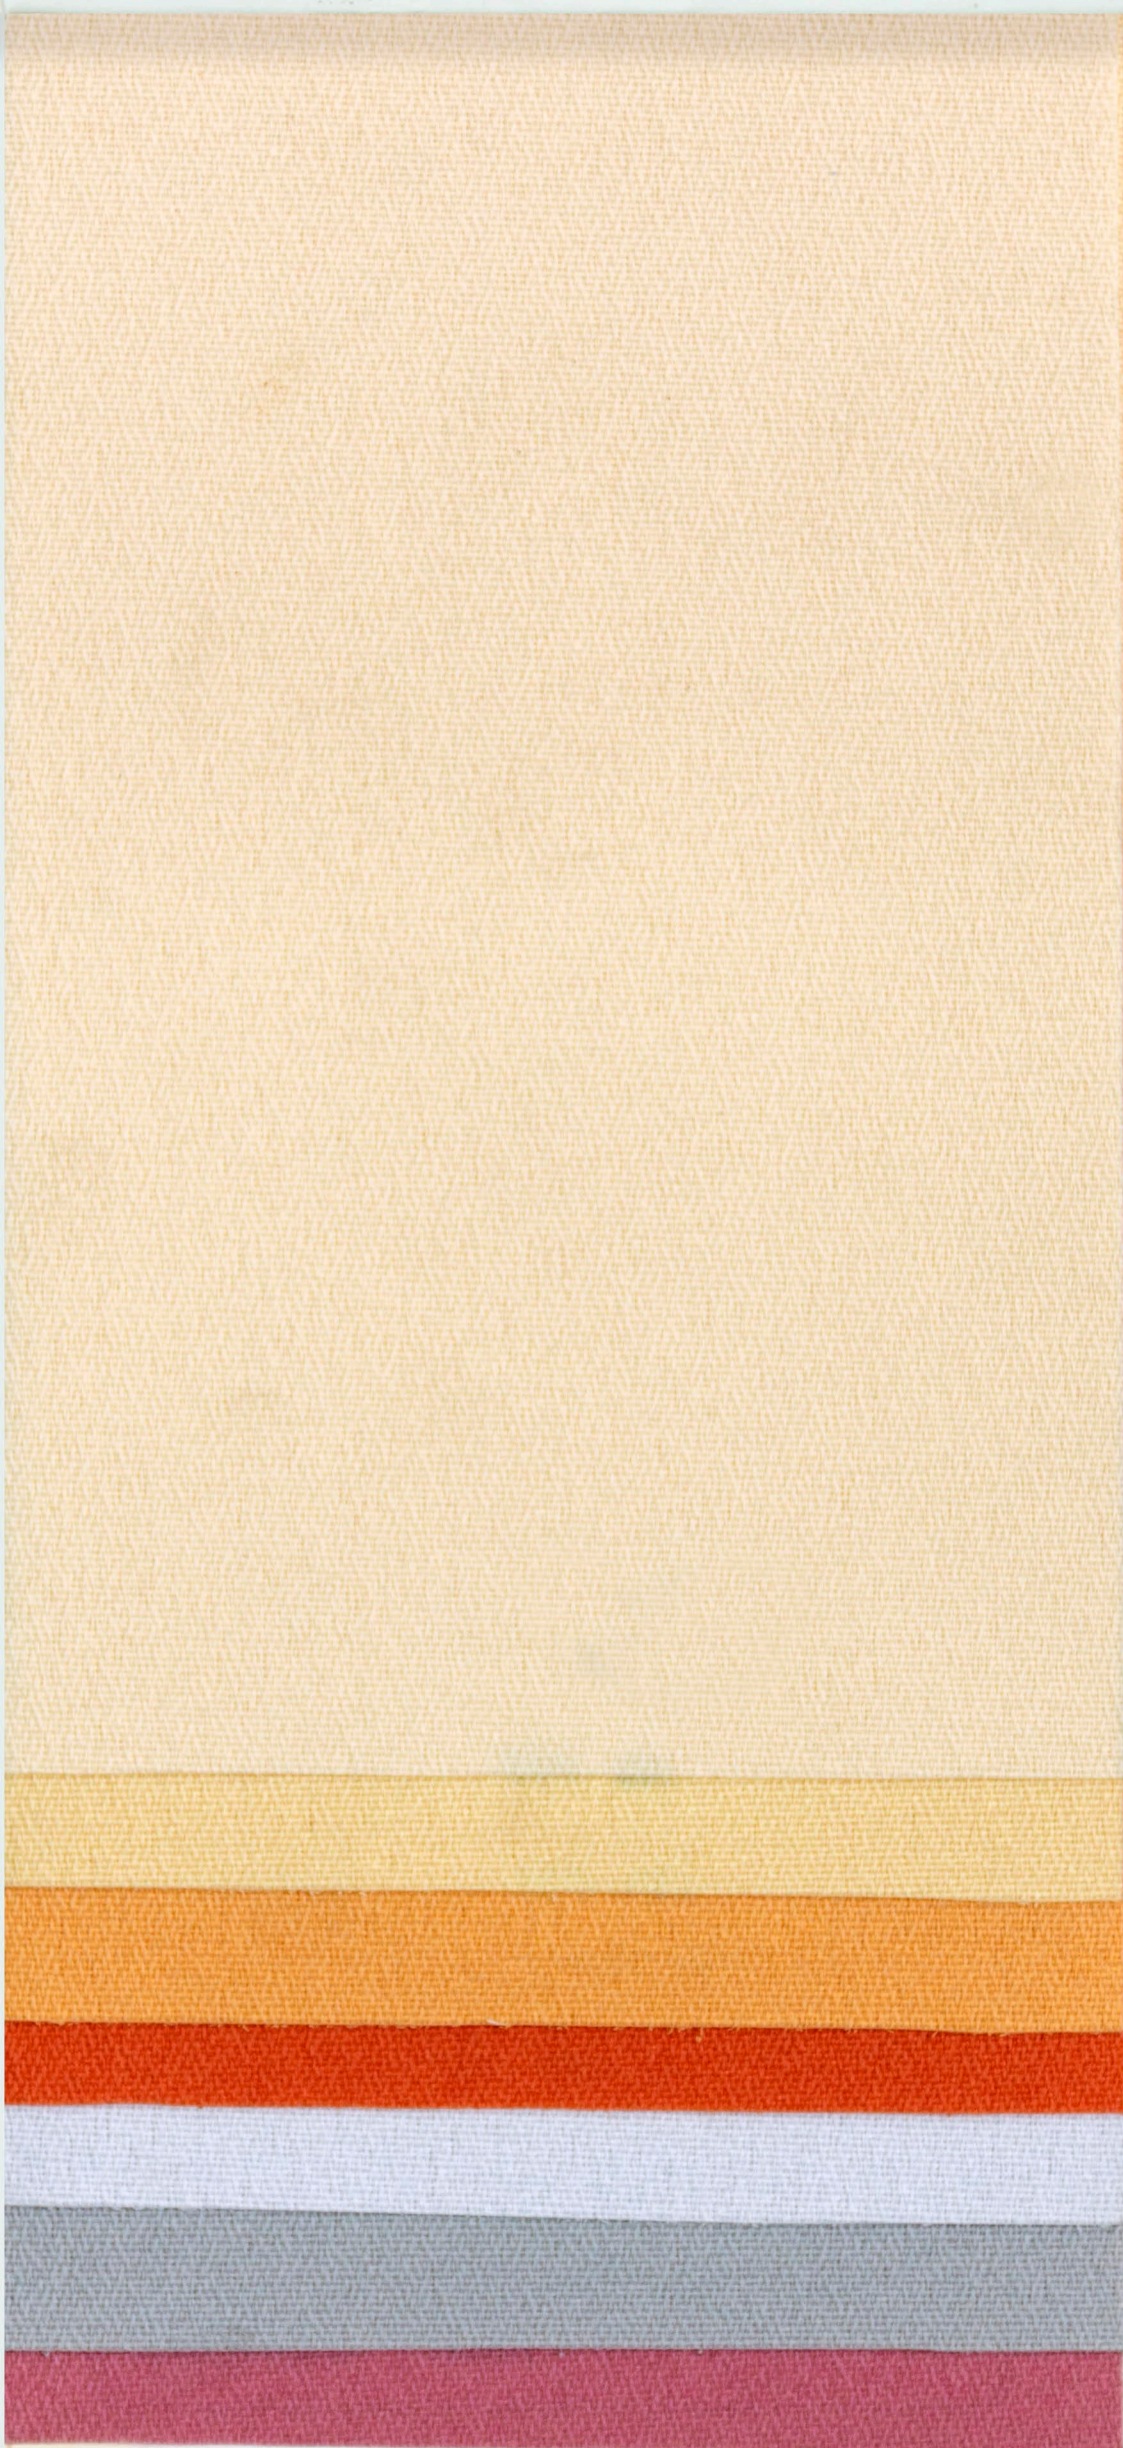

Vital

800

801

802

803

804

805

806

Vital Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.40 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Vital Series



ISO 9001:2000 Certified Company

Vertical Blinds



Orlando

850

851

852

853

854

855


856

857

Orlando Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.50 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Orlando Series



ISO 9001:2000 Certified Company

Vertical Blinds



Zigzag

625

626

627

628

629

630

Zigzag Series



ISO 9001:2000 Certified Company



Technical Detail


Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.36 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Zigzag Series



ISO 9001:2000 Certified Company

Vertical Blinds

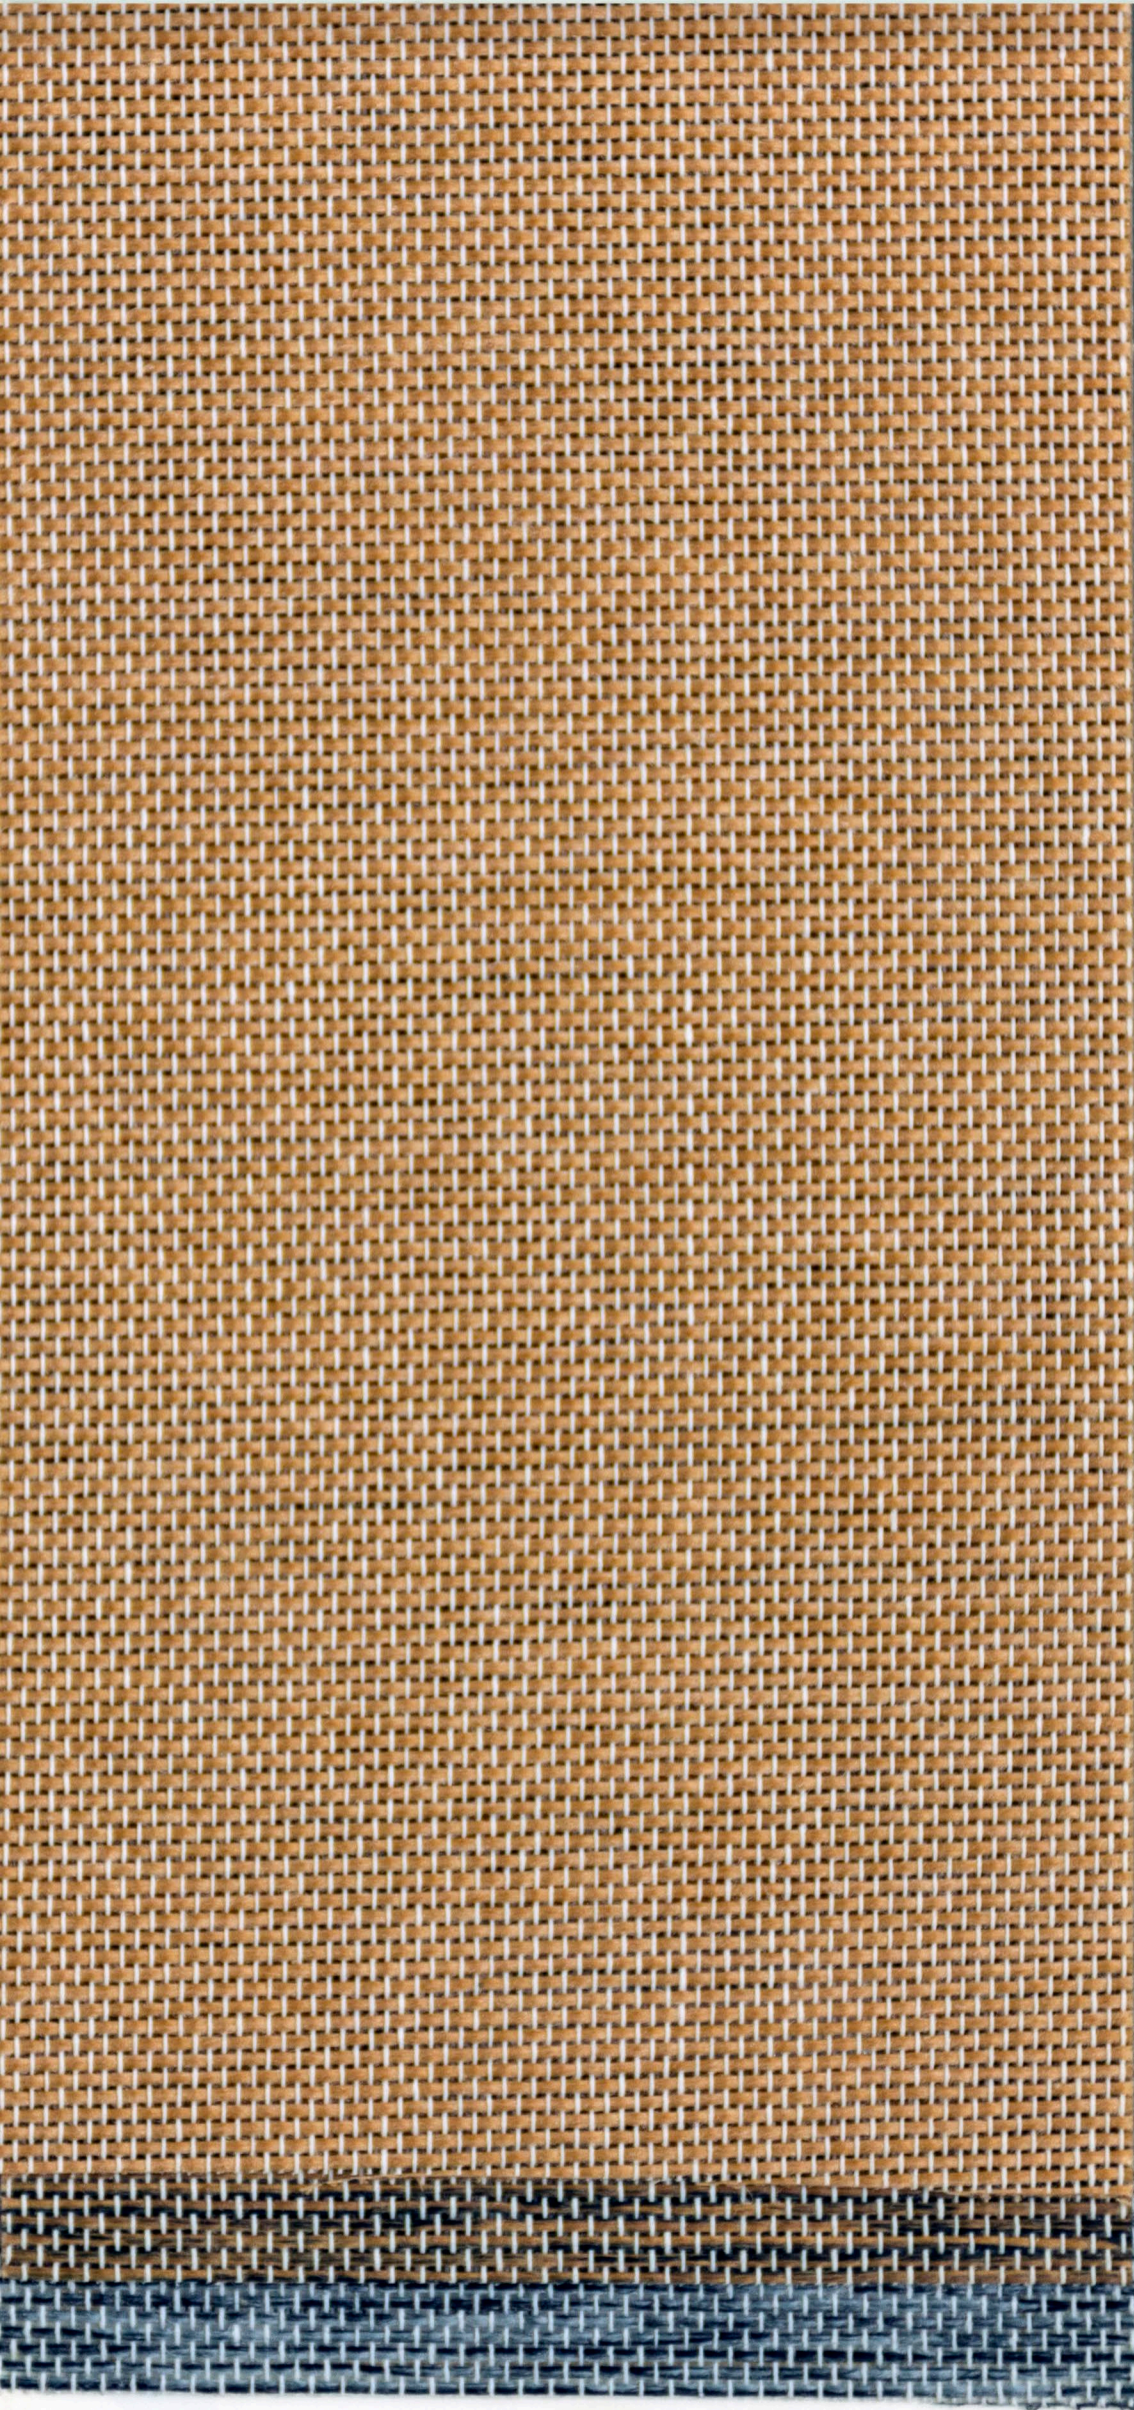

Screenline

975

976

977

Screenline Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Transparent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.55 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Screenline Series





ISO 9001:2000 Certified Company

Vertical Blinds



Carnival

675

676

677

678

Carnival Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Translucent
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.40 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Carnival Series



ISO 9001:2000 Certified Company

Vertical Blinds



Impact

901



902



903



904



905




906

Impact Series



ISO 9001:2000 Certified Company



Technical Detail


Type of Fabrics	Blackout
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.45 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Impact Series



ISO 9001:2000 Certified Company

Vertical Blinds

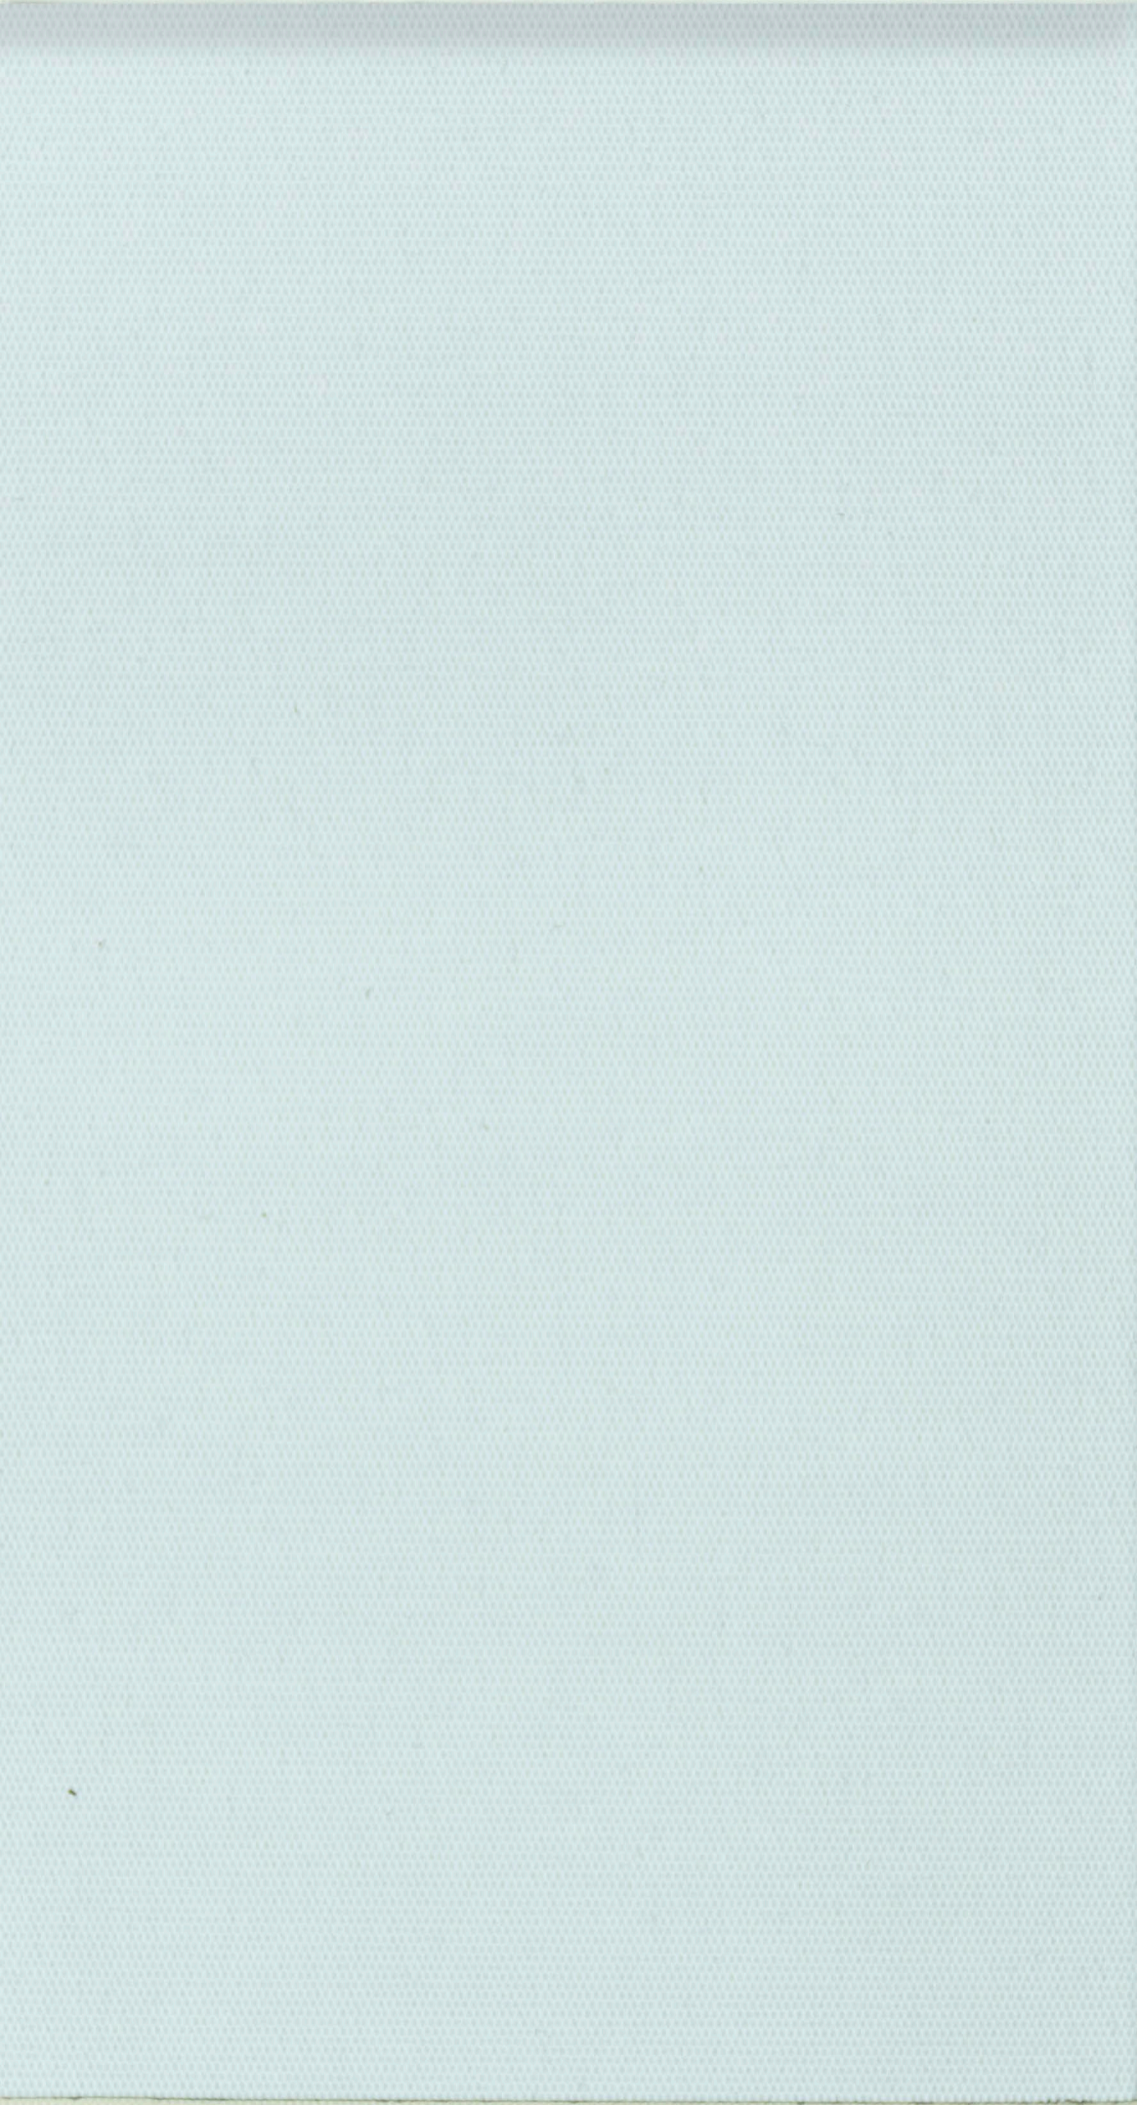

York

951



952



953



954

Yorks Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Blackout
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.30 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Yorks Series



ISO 9001:2000 Certified Company

Vertical Blinds



Pinnacle

925



926



927



928



929

Pinnacle Series



ISO 9001:2000 Certified Company



Technical Detail

Type of Fabrics	Blackout
Composition of Fabrics	100% Polyester Woven
Width	100 MM
Thickness (average)	0.38 mm
Coating	Acrylic Coating resistant to Cracking & Fraying
Cleaning	Conditionally Cleanable with damp cloth
Tearing Strength	Very High
Hanging Properties	Excellent

Pinnacle Series